





Protective helmet suitable for industrial work and construction sites. Its main purpose is to protect the user against falling objects and voltage. It has a safety chin strap that is unfasten at a load ranging between 15 and 25 daN, which eliminates the risk of strangling.

**DESCRIPTION**


-  W960IYX00 YELLOW
-  W960IRX00 RED
-  W960IWX00 WHITE
-  W960IBB00 BLACK
-  W960IQX00 HIGH VISIBILITY YELLOW

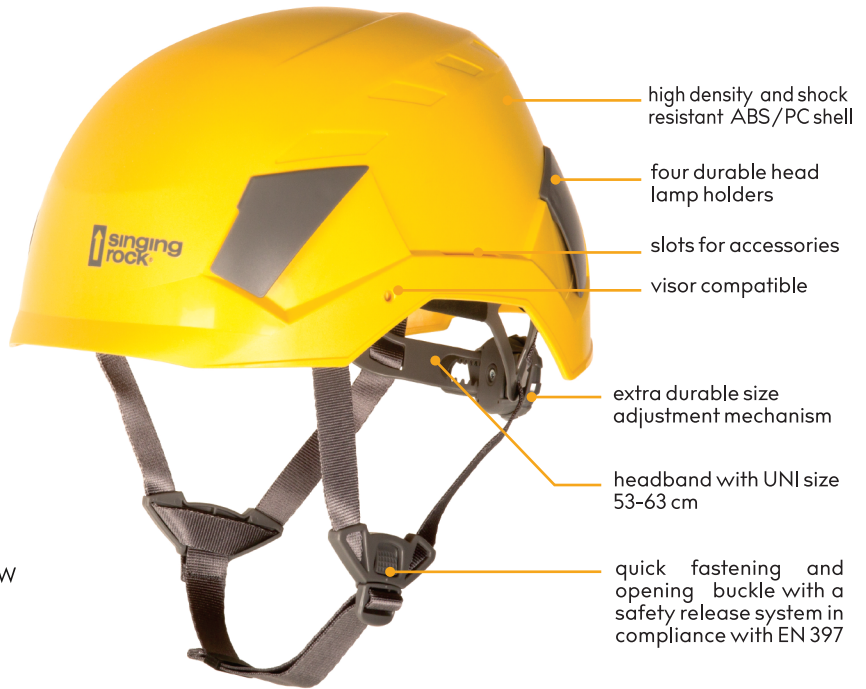


**KEY FEATURES**




two side and two rear adjusting sleeves to regulate the length of the chin straps



side universal slots for hearing protection: Peltor, Hellberg, 3M...




thin profile buckle fits well with all hearing protectors



fast, easy and effective size adjustment mechanism on the back of the helmet









four head lamp holders for any head lamp available on the market






reflective stickers included

**STANDARDS**

**FEATURES**

|  |   |   |   |   |   |
|--|---|---|---|---|---|
|  |  |  |  |  |  |
| EN 397<br>CE 1015  | min. 15 kg<br>max. 25 kg  | 440 V<br>a. c.  | -30°C   | ✓   | ✗   |

|   |   |   |
|---|---|---|
|  |  |  |
| 455 g   | 53 - 63cm   | unique number   |

