

↑ REACTOR 140

It belongs to the category of shock absorbers. Lightweight, practical shape does not restrict users at the work. Newly designed for users with a maximum weight of 140 kg (including equipment). Optional length of lanyards for diverse work.

DESCRIPTION


Shock absorber used primarily by workers on a structure, ladders and pylons.

Cover is made from black synthetic rubber and Cordura with PU coating.

Shock absorber is designed to capture safely a person weighting 140 kg (including equipment).

Maximum active breaking length of shock absorber is 175 cm.

Orange indicator is threaded through the attaching eyes and indicates an actual damage.

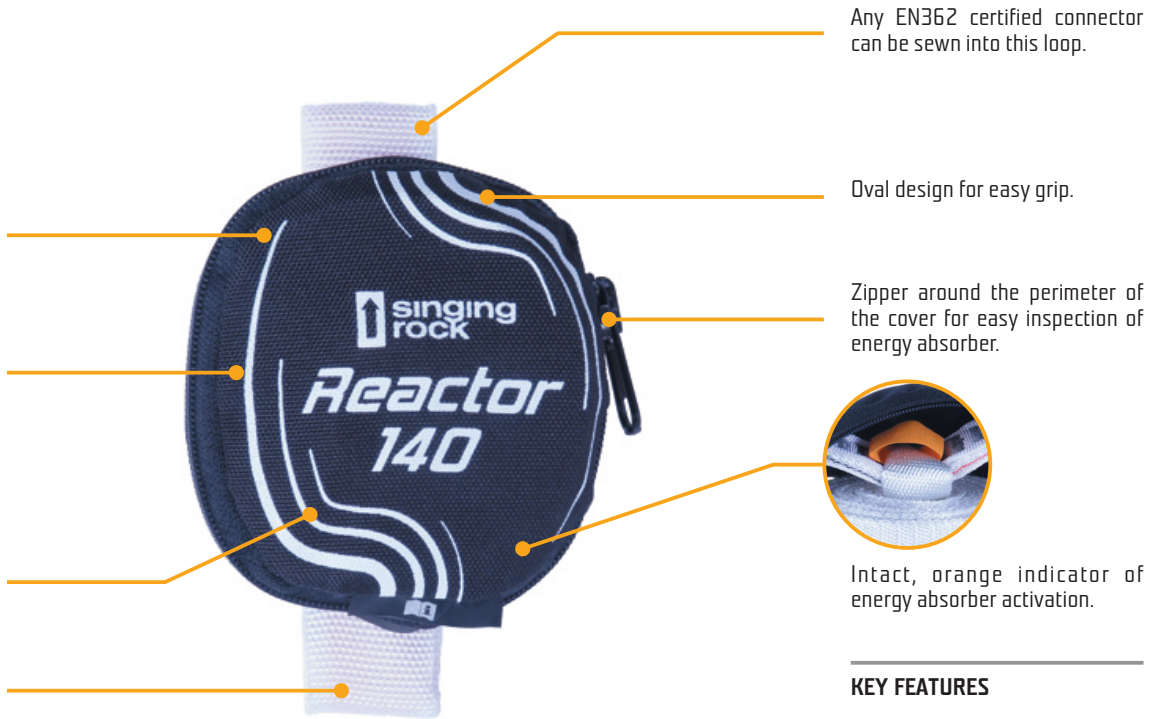

KEY FEATURES

- Lightweight (170 g)
- For user max. 140 kg
- Maximal length inc. 2 m

STANDARDS

CE 1019
EN 355:2002

FEATURES



140 kg



170 g / 6 oz



one person only



optional length depending on the model



unique numbers



guarantee

MATERIAL COMPOSITION

- 85% polyamide
- 13% polyester
- 1% powder coated steel
- 1% syntetic rubber



TECHNICAL DATA



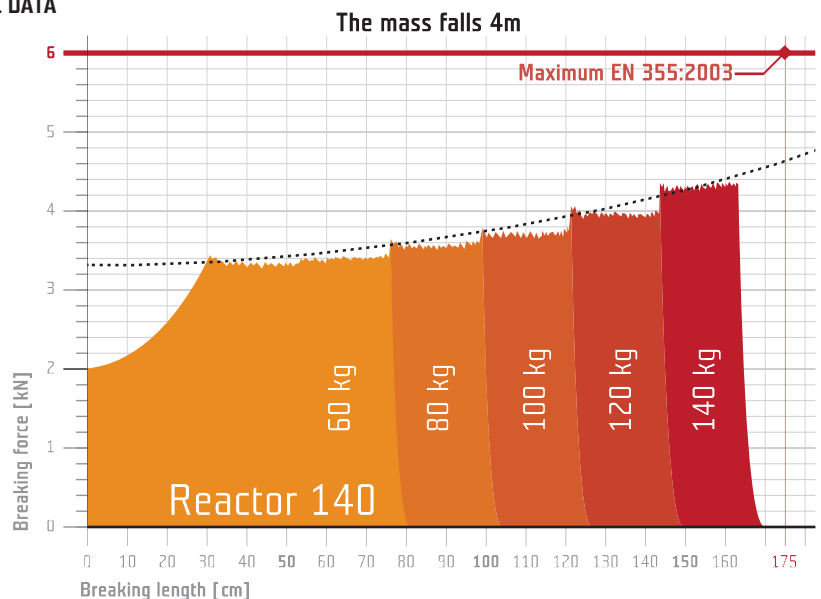


TABLE OF SIZES



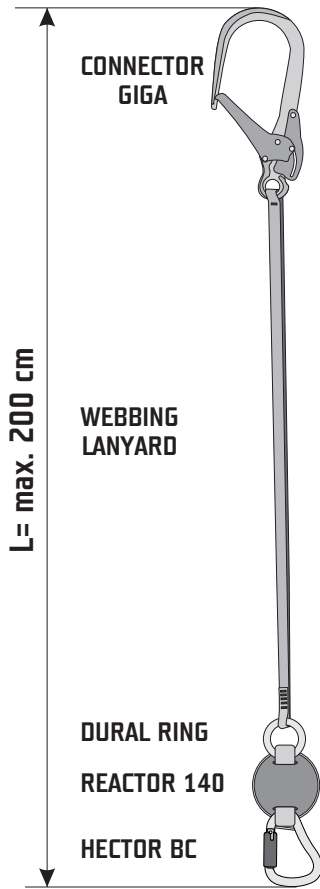


TYPE	CODE	CONNECTORS	LENGTH OF SYSTEM [cm]	WEIGHT [g]
"I" 85 cm	W4410W085	-	85	250
	W4411W085	K370	100	400
	W4412W085	K353	110	750
	W4413W085	K355	120	1230
"I" 155 cm	W4410W155	-	155	290
	W4411W155	K370	170	440
	W4412W155	K353	180	830
	W4413W155	K355	190	1270
"Y" 85 cm	W4420W085	-	85	210
	W4421W085	2x K370	100	610
	W4422W085	2x K353	110	1290
"Y" 155 cm	W4423W085	2x K355	120	2210
	W4420W155	-	155	390
	W4421W155	2x K370	170	690
EYE "Y" 155 cm	W4422W155	2x K353	180	1390
	W4423W155	2x K355	190	2310
	W4430W155	-	155	390
RING "Y" 155 cm	W4433W155	2x K355	190	2310
	W4440W155	-	155	530
ROPE "I" 85 cm	W4441W155	2x K370	170	830
	W4442W155	2x K353	180	1510
	W4450X085	-	85	290
ROPE "I" 155 cm	W4452X085	K353 black	110	790
	W4453X085	K355 black	120	1260
	W4450X155	-	155	370
ROPE "Y" 85 cm	W4452X155	K353 black	180	870
	W4453X155	K355 black	190	1340
	W4460X085	-	85	400
ROPE "Y" 155 cm	W4462X085	2x K353 black	110	1400
	W4463X085	2x K355 black	120	2340
	W4460X155	-	155	520
ADJUST	W4462X155	2x K353 black	180	1520
	W4463X155	2x K355 black	190	2460
ADJUST	W4470Y100	-	100-160	420
	W4471Y100	2x K370	115-175	570
	W4472Y100	2x K355	125-185	920




LANYARDS AND CONNECTORS

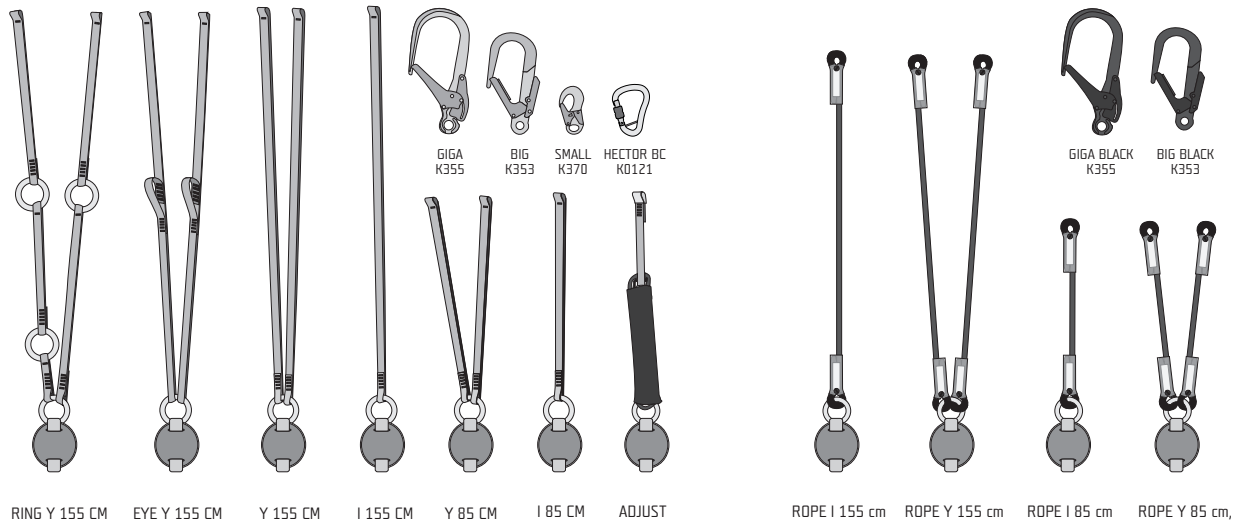


MINIMAL SAFETY DISTANCE FOR 100 KG

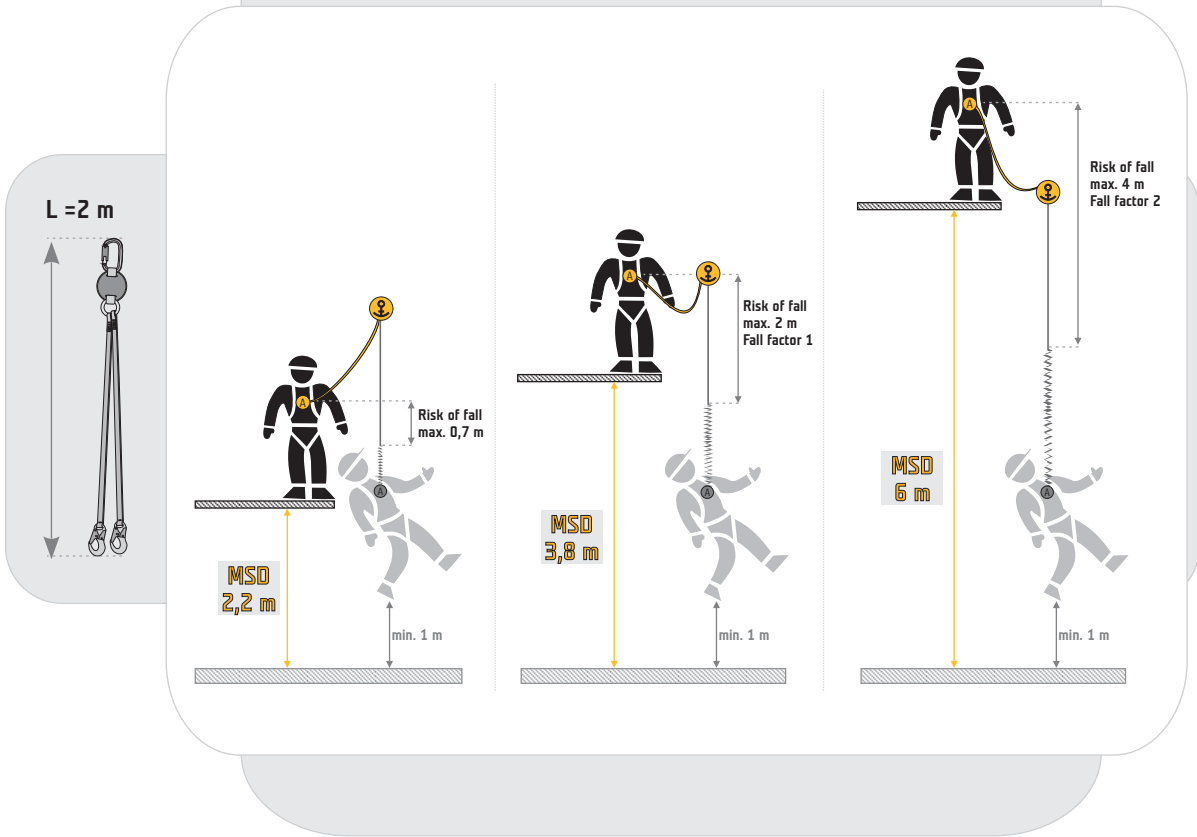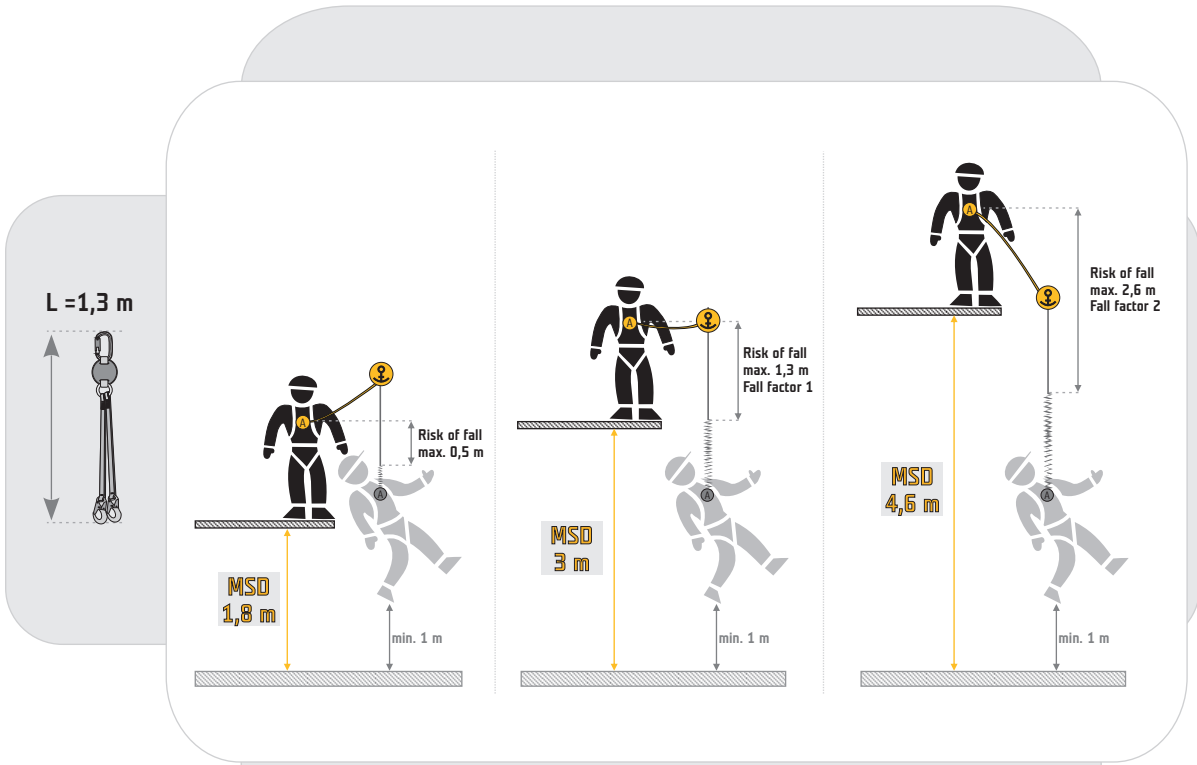

MINIMAL SAFETY DISTANCE FOR 140 KG

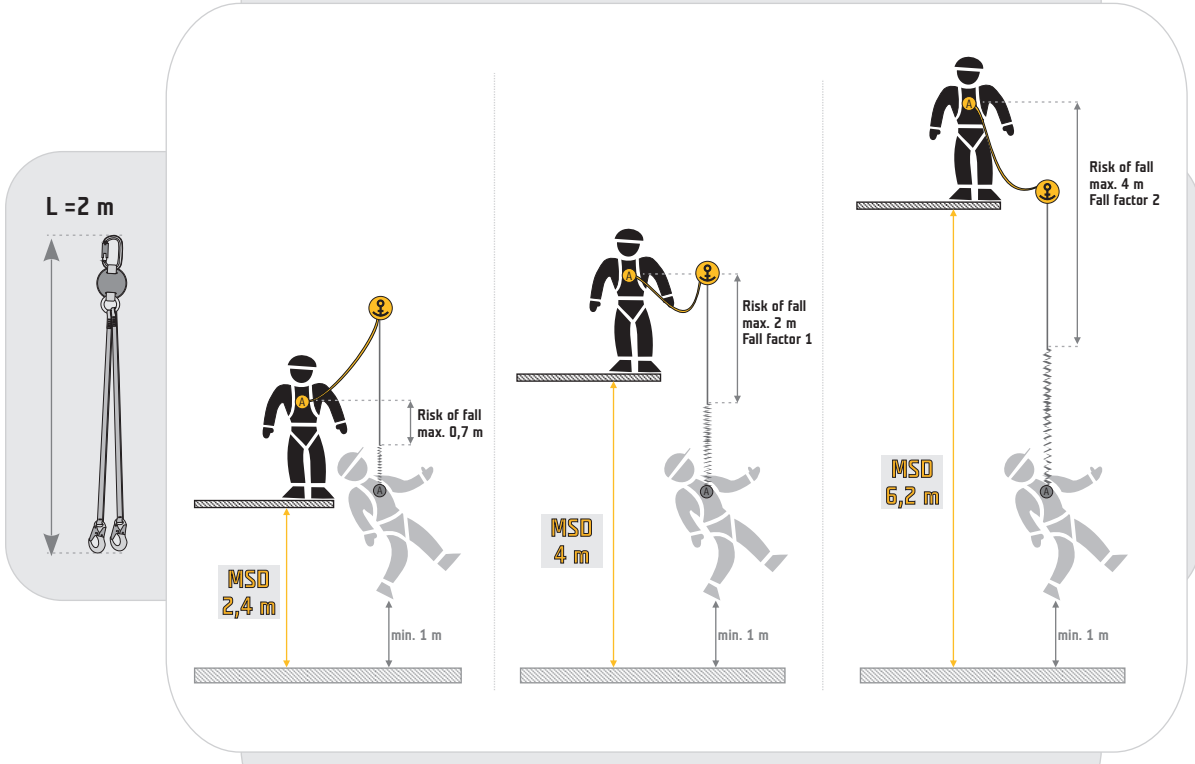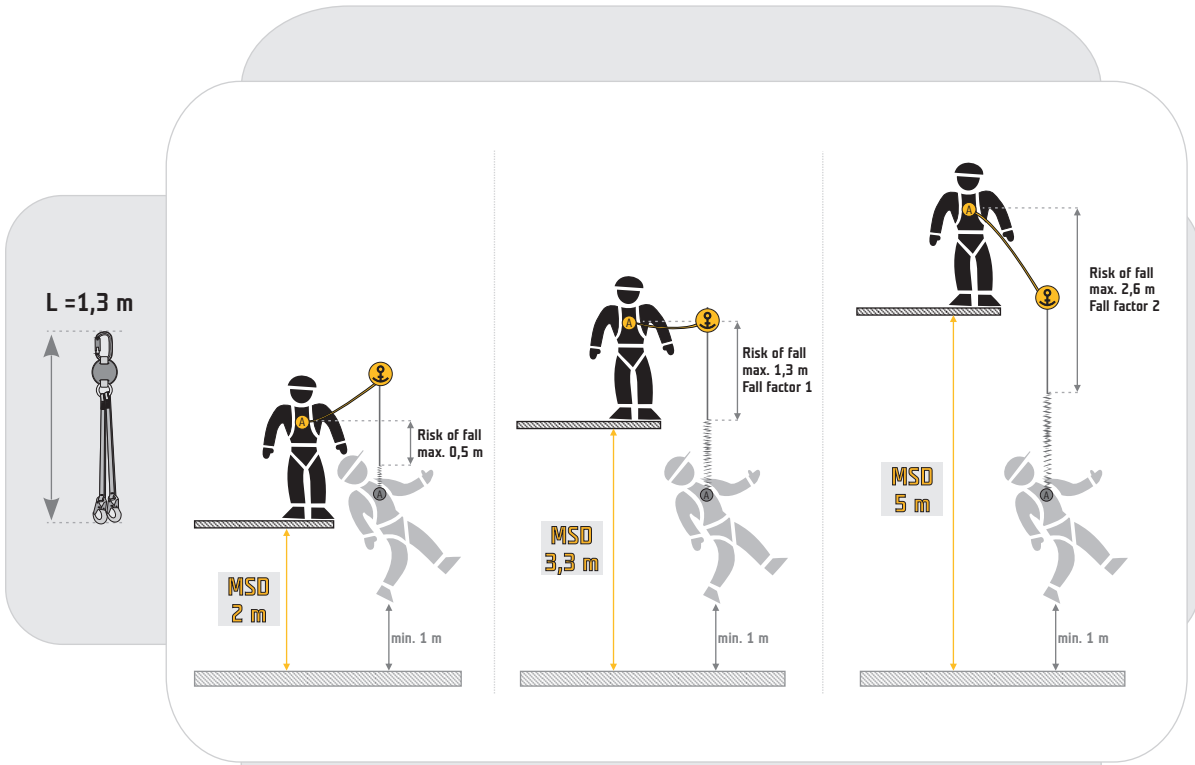

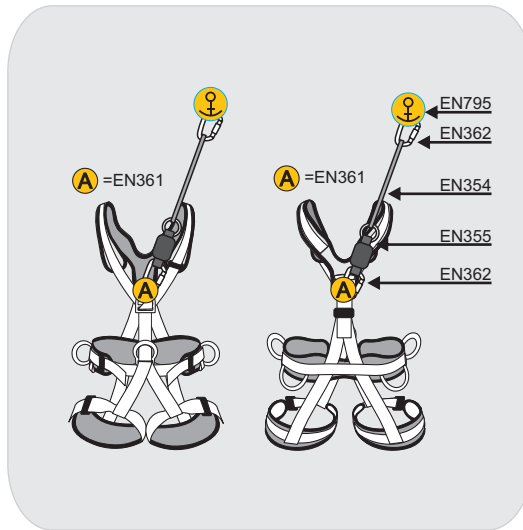

min. 2 people in the workplace
min. 2 osoby na pracovišti



It is not recommended fall factor greater than 1.
Není doporučovaný pádový faktor větší než 1.

!!! WARNING !!!
Danger of swing
!!! POZOR !!!
Nebezpečí zhoupnutí

