


## Dräger Polytron® 8700 Stationary gas detector (PIR 7000)

Quick and reliable detection of combustible gases and vapours in the ambient air: the microprocessor-based Polytron® 8700 transmitter, which contains a new, innovative IR sensor with drift-free and resistant optics, can also be integrated into your digital fieldbus system, thus providing additional diagnostic functions.

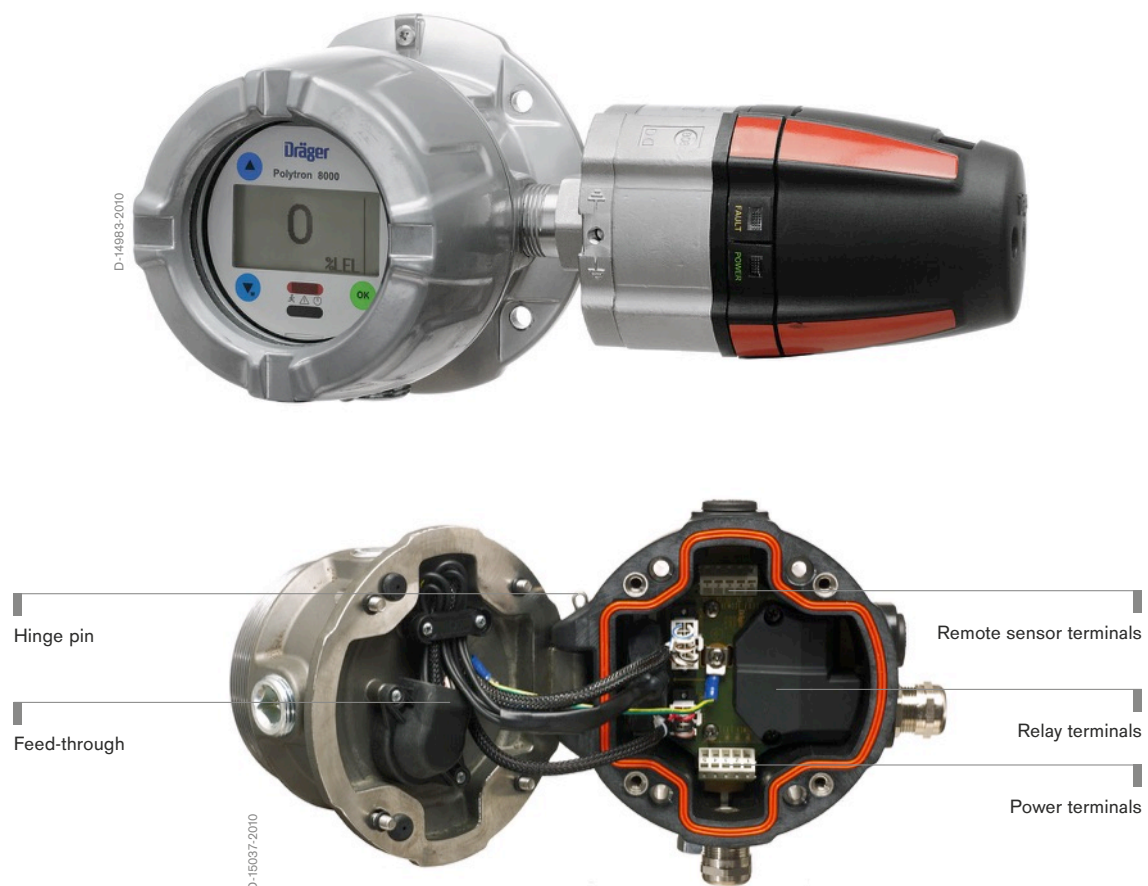

## Benefits

---

### Simple instrument management thanks to digital communication

With its HART® ability, the Dräger Polytron 8700 allows remote access using the Dräger PolySoft 8000 software for the quick and convenient evaluation of the instrument status. Integration in existing management systems (e.g. PactWare) is also possible using DTM. In addition, fieldbus systems such as Foundation Fieldbus or Profibus are supported by corresponding interfaces.

---

### Efficient, stable and robust – Dräger PIR 7000

With short response times and a high signal stability, the Dräger PIR 7000 offers a high degree of safety – thanks to an extremely light-efficient optics with a 4-beam signal-stabilizing system. Another advantage is its low sensitivity to dust or dirt deposits on the optical surfaces and to insects in the measuring cuvette, while offering a drift-free output signal and longer maintenance intervals.

---

### Proven – and still getting better: Dräger measurement technology

Dräger has been developing and manufacturing sensors and gas detectors for industrial use for more than 40 years. And with each new device generation, we drive our measurement technology a bit further. With the Polytron 8700, you will definitely benefit from this experience and power of innovation. Its sensors are based on an open, double-compensated optical infrared system.

---

### Library containing up to 100 gases (types 334 and 340)

Each of the gases listed there can, for example, be cross-calibrated with vapours and preset gases, such as methane or propane. All calculations and linearisations are performed automatically.

---

### Optional: Three relays for controlling external equipment

On request, the Dräger Polytron 8700 can be equipped with three integrated relays. This enables you to use it as an independent gas detection system with two arbitrarily adjustable concentration alarms and one fault alarm. Audio alarms, signal lights, or similar devices can, thus, be controlled locally – without an additional cable between the transmitter and a central controller. The sensor signal can be evaluated using the 4-to-20-mA signal.

---

### Optional: Two mounting sets for easy flange-mounting

The housing has four mounting holes. Two different mounting sets are available for installing the Polytron 8700: a duct-mount and a pipe-mount set. This means that the transmitter can be easily installed anywhere – e.g., on a smooth wall, a pipe or an exhaust duct.

## Benefits

### Further advantages:

- Easy and cost-effective: one-man calibration
- Quick and easy wiring
- Available as flameproof or increased safety version
- Aluminium or 316 L stainless steel housing for the most extreme industrial conditions
- Extremely user-friendly software thanks to a minimum number of menu items
- Backlit display: easy to read, even in the dark and without a flash light
- Traffic light status indicator (green = no danger, yellow = error, flashing red = gas alarm)
- Beam block warning signal if the optics are heavily contaminated
- Measuring ranges in the ppm, %LEL and Vol.-% range
- Matrix display allows the flexible setting of measuring ranges and units
- SIL 2 certified by the German TÜV Süd

## System components



2-669-95

### Dräger REGARD® control system

Tried and tested thousands of times and infinitely flexible. The modular Regard® control system can be individually adapted to any monitoring task. Suitable for SIL 2 systems, the Regard® system is also ATEX approved, and meets EMC directive standards.

## System components

ST-335-2004



### Dräger REGARD-1

The Dräger REGARD-1 is a standalone, self contained single channel control system for the detection of Toxic, Oxygen and Ex hazards. The control system is fully configurable for a single input from either a 4 to 20 mA transmitter or a Dräger Polytron SE Ex measuring head.

D-27771-2009



### Dräger REGARD® 3900

The Dräger REGARD® 3900 is a standalone, self contained control system for the detection of Toxic, Oxygen and Ex hazards. The control system is fully configurable between 1 and 16 channels, depending upon the type and quantity of input/output boards installed.

## Accessories

ST-5673-2006



### Magnetic wand

## Related Products

ST-11659-2007



### Dräger PIR 7000

The Dräger PIR 7000 is an explosion proof point infrared gas detector for continuous monitoring of flammable gases and vapours. With its stainless steel SS 316L enclosure and drift-free optics this detector is built for the harshest industrial environments, e.g. offshore installations.

D-14979-2010



### Dräger Polytron® 5700

Quick, reliable and cost-effective detection of combustible gases and vapors in ambient air: the microprocessor-based transmitter is the result of more than 40 years of experience in measurement technology and contains a new, innovative IR sensor with drift-free optics. These optics are extremely resistant against deposits and insects in the beam.

## Technical Data

### Dräger Polytron® 8700

Type	Flameproof 'd' or combined increased safety 'd/e' transmitter		
Gases	Combustible gases and vapours		
Measuring ranges	ppm,		0 to 20 up to 100 % LEL, 0 to 100 Vol.-% CH <sub>4</sub>
	%LEL or Vol.-%;		0 to 1,000 ppm C <sub>3</sub> H <sub>8</sub> , 0 to 20 up to 100 % LEL
	user adjustable		0 to 5 Vol.-%
Display	Backlit graphic LCD; 3 status LEDs (green/yellow/red)		
Electrical data	Analogue signal output	Normal operation	4-to-20-mA
		Maintenance	Steady 3.4 mA or 4 mA ± 1 mA 1 Hz modulation; user selectable
		Fault	< 1.2 mA
	Digital signal output		HART®
	Supply Voltage		10 to 30 VDC, 3-wire
	Relay rating (Option)		2 alarm, 1 fault relay, SPDT 5 A @ 230 VAC, 5 A @ 30 VDC, resistive load
Ambient conditions (see also sensor data sheet)	Temperature without Relay		-40 to 170.6 °F / -40 to +77 °C
	Temperature with Relay		-40 to 158 °F/ -40 bis +70 °C
	Pressure		20.7 to 38.4 inch Hg / 700 to 1,300 mbar
	Humidity		0 to 100% RH, non-condensing
Enclosure	Transmitter housing		Epoxy-coated copper free aluminum or 316L stainless steel
	Enclosure rating		NEMA 4X & 7, IP65/66/67
	Cable entry		¾" NPT female conduit or M20 cable gland
	Size (l x w x d, approx.)	without Docking Station	5.9" × 11.4" × 5.1" / 150 × 290 × 130 mm
		with Docking Station	7.1" × 11.8" × 7.4" / 180 × 300 × 190 mm
	Weight (approx.)	without Docking Station aluminium	8.5 lbs / 3.9 kg
		without Docking Station, 316 stainless steel	12.6 lbs / 5.7 kg
		with Docking Station aluminium	11.5 lbs / 5.2 kg
		with Docking Station, 316 stainless steel	15.6 lbs / 7.1 kg
Approvals *)	UL **)		Class I, Div 1, Groups A, B, C, D; Class II, Div 1, Groups E, F, G Class I, Zone 1, Group IIC; T-Code T4/T6
	CSA		Class I, Div 1, Groups A, B, C, D

## Technical Data

	Class II, Div 1, Groups E, F, G Class I, Zone 1, Group IIC; T-Code T4/T6
IECEX	Ex d IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+80 °C; 'd' version
	Ex de IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+80 °C; 'e' version;
ATEX	Ex tb IIIC T80/130 °C Db II 2G Ex d IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+80 °C; 'd' version
	II 2G Ex de IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+80 °C; 'e' version;
CE markings	II 2D Ex tb IIIC T80/130 °C Db ATEX (directive 94/9/EC) Electromagnetic compatibility (Directive 2004/108/EC) Low voltage (directive 2006/95/EC)

\*) All Docking Station versions are only ATEX / IECEx approved.  
\*\*) With relay Ta ≤ 70 °C

## Ordering Information

Polytron® 8700 Type 334 and Type 340	Aluminium 'd'	SS316L 'd'	Aluminium 'e'	SS316L 'e'
Without relays (Type 334)	45 44 601	45 44 610	45 44 619**)	45 44 628**)
With relays (Type 334)	45 44 602	45 44 611	45 44 620***)	45 44 629***)
Remote version w/o relays (Type 334)			45 44 673*)	45 44 682*)
Remote version w/ relays (Type 334)			45 44 674*)	45 44 683*)
Without relays (Type 340)	45 44 637	45 44 646	45 44 655**)	45 44 664**)
With relays (Type 340)	45 44 638	45 44 647	45 44 656***)	45 44 665***)
Remote version w/o relays (Type 340)			45 44 691*)	45 44 700*)
Remote version w relays (Type 340)			45 44 692*)	45 44 701*)

\*) Order Dräger PIR 7000 Remote 'e' Version and Docking Station 68 12 275 separately.

\*\*) Order Docking Station 68 12 420 for power only wires separately.

\*\*\*) Order Docking Station 68 12 275 for power and/or relay wires separately.

## Ordering Information

Magnetic wand for menu access (blue body, white logo)	45 44 101
Docking Station Power only version (includes 1 cable gland)	68 12 420
Docking Station Power, Relay and/or Remote version (includes 2 cable glands)	68 12 275
Cable Gland Docking Station	68 12 868
Pipe Mount Kit	45 44 198
Duct Mount Kit Polytron® 87X0 for PIR 7x00	68 12 300
Duct Mount Kit Flow Cell for PIR 7x00	68 11 945
Duct Mount Kit Bump Test Adapter for PIR 7x00	68 11 990
Status Indicator for PIR 7000	68 11 625
Splash Guard for PIR 7000	68 11 911
Flow Cell for PIR 7000	68 11 490
Bump Test Adapter for PIR 7000	68 11 630
Insect Guard for PIR 7x00	68 11 609
Hydrophobic Filter for PIR 7x00	68 11 890
Calibration Adapter for PIR 7x00	68 11 610
Process Adapter for PIR 7x00, POM (Polyoxymethylene)	68 11 915
Process Adapter for PIR 7x00, Stainless Steel	68 11 415
Junction Box Aluminium for Remote Mount 'd'	45 44 099
Junction Box Stainless Steel for Remote Mount 'd'	45 44 098
Spacer	68 12 617
Dräger PIR 7000 334 for Remote 'e' Version	68 11 825
Dräger PIR 7000 340 for Remote 'e' Version	68 11 819

### CORPORATE HEADQUARTERS

Drägerwerk AG & Co. KGaA  
Moislinger Allee 53–55  
23558 Lübeck, Germany  
[www.draeger.com](http://www.draeger.com)

### Manufacturer:

Dräger Safety AG & Co. KGaA  
Revalstraße 1  
23560 Lübeck, Germany

### SYSTEM CENTERS

**P. R. CHINA**  
Draeger Safety Equipment  
(China) Co., Ltd.  
A22 Yu An Rd, B Area,  
Tianzhu Airport Industrial Zone,  
Shunyi District,  
Beijing 101300  
Tel +86 10 80 49 80 00  
Fax +86 10 80 49 80 05

### GERMANY

Dräger Safety AG & Co. KGaA  
Revalstrasse 1  
23560 Lübeck  
Tel +49 451 882-2794  
Fax +49 451 882-4991

### UNITED KINGDOM

Draeger Safety UK Ltd.  
Blyth Riverside Business Park  
Blyth, Northumberland NE24 4RG  
Tel +44 1670 352 891  
Fax +44 1670 544 475

### REGION EUROPE SOUTH

Dräger Safety France SAS  
25, rue Georges Besse  
92182 Antony Cedex, France  
Tel +33 1 46 11 56 00  
Fax +33 1 40 96 97 20  
[Europe.South@draeger.com](mailto:Europe.South@draeger.com)

### USA

Draeger Safety, Inc.  
505 Julie Rivers, Suite 150  
Sugar Land, TX 77478  
Tel +1 281 498 1082  
Fax +1 281 498 5190  
[info.gds@draeger.com](mailto:info.gds@draeger.com)

### REGION ASIA PACIFIC

Draeger Safety Asia Pte Ltd  
25 International Business Park  
#04-20/21 German Centre  
Singapore 609916  
Tel +65 6308 9400  
Fax +65 6308 9401  
[asia.pacific@draeger.com](mailto:asia.pacific@draeger.com)

### REGION CENTRAL AND SOUTH AMERICA

Dräger Panama Comercial  
S. de R.L.  
Complejo Business Park,  
V tower, 10th floor  
Panama City  
Tel +507 377-9100  
Fax +507 377-9130  
[contactcsa@draeger.com](mailto:contactcsa@draeger.com)

### REGION MIDDLE EAST, AFRICA

Dräger Safety AG & Co. KGaA  
Branch Office  
P.O. Box 505108  
Dubai, United Arab Emirates  
Tel +971 4 4294 600  
Fax +971 4 4294 699  
[contactuae@draeger.com](mailto:contactuae@draeger.com)

Locate your Regional  
Sales Representative at:  
[www.draeger.com/contact](http://www.draeger.com/contact)

