


Dräger Polytron® 5700 Flammable Gas Detection

Quick, reliable and cost-effective detection of combustible gases and vapors in ambient air: the microprocessor-based transmitter is the result of more than 40 years of experience in measurement technology and contains a new, innovative IR sensor with drift-free optics. These optics are extremely resistant against deposits and insects in the beam.

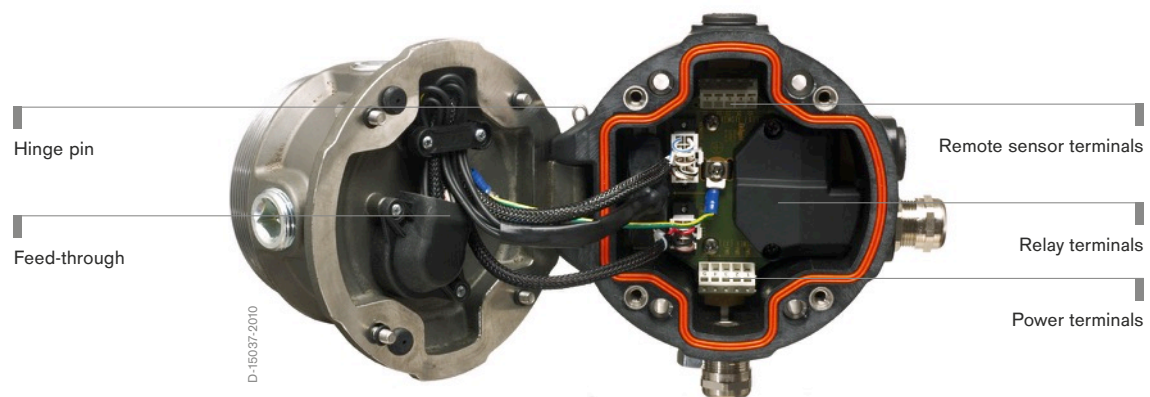

Benefits

Proven – and still getting better: Dräger measurement technology

Dräger has been developing and manufacturing sensors and gas detectors for industrial use for more than 40 years. And with each new device generation, we drive our measurement technology a bit further. With the Polytron 5700, you will definitely benefit from this experience and power of innovation. Its sensors are based on an open, double-compensated optical infrared system. This innovative design offers the following advantages:

- short response times
 - low sensitivity to dust or dirt deposits on the optical surfaces and to insects in the measuring cuvette
 - longer maintenance intervals
 - drift-free output signal
 - high signal stability thanks to an extremely light-efficient optics with a 4-beam signal-stabilizing system
-

Library containing up to 100 gases (types 334 and 340):

Each of the gases listed there can, for example, be cross-calibrated with vapors and preset gases, such as methane or propane. All calculations and linearizations are performed automatically.

Optional: three relays for controlling external equipment

Upon request, the Polytron 5700 can be supplied with three integrated relays. This enables you to use it as an independent gas detection system with two arbitrarily adjustable concentration alarms and one fault alarm. Audio alarms, signal lights, or similar devices can, thus, be controlled locally – without an additional cable between the transmitter and a central controller. The sensor signal can be evaluated using the 4 to 20 mA signal.

Optional: two mounting sets for easy flange-mounting

The housing has four mounting holes. Two different mounting sets are available for installing the Polytron 5700: a duct-mount and a pipe mount set. This means that the transmitter can be easily installed anywhere – e.g., on a smooth wall, a pipe or an exhaust duct.

Quick and easy wiring

The electronics and the bezel form a single unit. Simply pull them out of the housing. Then insert the three-wire cable into the terminals – either through the Ex-e cable gland or through the seal on the conduit. Finally plug the terminal block into the PCB.

Easy and cost-effective: single-operator calibration

The transmitter settings can be changed and maintenance carried out without opening the housing. Declassification of the hazardous, classified area is not necessary. Use the magnetic wand to quickly and easily select menu items and functions. An additional hand held terminal is not required.

Benefits

Further advantages:

- Available as flameproof or increased safety version
- Aluminum or 316 L stainless steel housing for the most extreme industrial conditions
- Extremely user-friendly software thanks to a minimum number of menu items
- Backlit display: easy to read, even in the dark and without a flashlight
- Traffic light status indicator (green = no danger, yellow = error, flashing red = gas alarm)
- Beam block warning signal if the optics are heavily contaminated
- Measuring ranges in the ppm, %LEL and Vol.% range

System components



2-669-95

Dräger REGARD® control system

Tried and tested thousands of times and infinitely flexible. The modular Regard® control system can be individually adapted to any monitoring task. Suitable for SIL 2 systems, the Regard® system is also ATEX approved, and meets EMC directive standards.



ST-335-2004

Dräger REGARD-1

The Dräger REGARD-1 is a standalone, self contained single channel control system for the detection of Toxic, Oxygen and Ex hazards. The control system is fully configurable for a single input from either a 4 to 20 mA transmitter or a Dräger Polytron SE Ex measuring head.

System components



D-27777-2009

Dräger REGARD® 3900

The Dräger REGARD® 3900 is a standalone, self contained control system for the detection of Toxic, Oxygen and Ex hazards. The control system is fully configurable between 1 and 16 channels, depending upon the type and quantity of input/output boards installed.

Accessories



D-88363-2013

Magnetic Wand

for menu access

Related Products



ST-11859-2007

Dräger PIR 7000

The Dräger PIR 7000 is an explosion proof point infrared gas detector for continuous monitoring of flammable gases and vapours. With its stainless steel SS 316L enclosure and drift-free optics this detector is built for the harshest industrial environments, e.g. offshore installations.



D-15005-2010

Dräger Polytron® 5200

Quick, reliable and cost-effective detection of combustible gases and vapors in ambient air: the microprocessor-based transmitter is the result of more than 40 years of experience in measurement technology. In addition, the CatEx sensor of the Polytron® 5200 DD can be replaced with a more poison-resistant IR sensor, upgrading the Polytron® 5200 DD to an IR device (Polytron® 5310).

Technical Data

Dräger Polytron 5700

Type	Explosion proof 'd' or combined increased safety 'de' transmitter			
Gases	Combustible gases and vapors			
Ranges	Discrete values for ppm, %LEL or vol%; user selectable	Type 334:	0 to 20 up to 100 %LEL, 0 to 100 % vol% CH ₄	
		Type 340:	0 to 1000 ppm C ₃ H ₈ , 0 to 5 up to 100 %LEL	
Display	4-digit backlit LCD; 3 status LEDs (green/yellow/red)			
Electrical data	Signal Output	Normal operation	4 to 20 mA	
		Maintenance	steady 3.4 mA or 4 mA ± 1 mA 1 Hz modulation; user selectable	
		Fault	< 1.2 mA	
	Supply Voltage	10 to 30 VDC, 3-wire		
Relay Rating (option)	Two alarm, one fault relay, SPDT 5 A @ 230 VAC, 5 A @ 30 VDC, resistive load			
Ambient conditions (see also sensor data sheet)	Temperature	- 40 to + 176 °F / - 40 to + 80 °C		
	Pressure	20.7 to 38.4 inch Hg / 700 to 1300 mbar		
	Humidity	0 to 100 %RH, non-condensing		
Enclosure	Transmitter housing	epoxy-coated copper free aluminum or 316L stainless steel		
	Enclosure Rating	NEMA 4X & 7, IP 65/66/67		
	Cable Entry	¾" NPT female conduit or M20 cable gland		
	Size (l x w x d, approx.)	without e-Box	5.9" x 11.4" x 5.1" / 150 x 290 x 130 mm	
		with e-Box	7.1" x 11.8" x 7.4" / 180 x 300 x 190 mm	
	Weight (approx.)	without e-Box, aluminum	8.5 lbs / 3.9 kg	
		without e-Box, stainless steel 316	12.6 lbs / 5.7 kg	
with e-Box, aluminum		11.5 lbs / 5.2 kg		
with e-Box, stainless steel 316		15.6 lbs / 7.1 kg		
Approvals *)	UL **)	Class I, Div 1, Groups A, B, C, D; Class II, Div 1, Groups E, F, G Class I, Zone 1, Group IIC; T-Code T4/T6 -40°C ≤ Ta ≤ +40/+80°C		
	CSA **), ***)	Class I, Div 1, Groups A, B, C, D; Class II, Div 1, Groups E, F, G Class I, Zone 1, Group IIC; T-Code T4/T6 -40°C ≤ Ta ≤ +40/+80°C		
	ATEX, IECEx	II 2G Ex d IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+80 °C; 'd' version		

Technical Data

	II 2G Ex de IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+80 °C; 'e' version;
	II 2D Ex tb IIIC T80/130°C Db, -40°C ≤ Ta ≤ +40/+80°C
CE-mark	ATEX (directive 94/9/EC) Electromagnetic compatibility (directive 2004/108/EC) Low voltage (directive 2006/95/EC)
*) All e-Box versions are only ATEX / IECEx approved	
**) with relay Ta ≤ 70 °C	
***) pending	

Ordering Information

Polytron 5700 Type 334 and Type 340

	Aluminum 'd'	SS316L 'd'	Aluminum 'e'	SS316L 'e'
Without relays (Type 334)	45 44 220	45 44 222	45 44 224**)	45 44 228**)
With relays (Type 334)	45 44 221	45 44 223	45 44 225***)	45 44 229***)
Remote version w/o relays (Type 334)			45 44 226*)	45 44 230*)
Remote version w/relays (Type 334)			45 44 227*)	45 44 231*)
Without relays (Type 340)	45 44 240	45 44 242	45 44 244**)	45 44 248**)
With relays (Type 340)	45 44 241	45 44 243	45 44 245***)	45 44 249***)
Remote version w/o relays (Type 340)			45 44 246*)	45 44 250*)
Remote version w/relays (Type 340)			45 44 247*)	45 44 251*)

*) order Dräger PIR 7000 Remote 'e' Version and e-Box 68 12 275 separately

**) order e-Box 68 12 420 for power only wires separately

***) order e-Box 68 12 275 for power and/or relay wires separately

Magnetic Wand (for menu access; blue body, white logo)	45 44 101
e-Box Power only version (includes 1 cable gland) / Docking Station	68 12 420
e-Box Power, Relay and/or Remote version (includes 2 cable glands) / Docking Station	68 12 275
Cable Gland e-Box	68 12 868
Pipe Mount Kit	45 44 198
Duct Mount Kit Polytron 57X0 for PIR 7X00	68 12 300
Duct Mount Kit Flow Cell for PIR 7X00	68 11 945
Duct Mount Kit Bump Test Adapter for PIR 7X00	68 11 990
Polytron 5700 Status Indicator for PIR 7000	68 11 625
Polytron 5700 Splash Guard for PIR 7000	68 11 911
Polytron 5700 Flow Cell for PIR 7000	68 11 490
Polytron 5700 Bump Test Adapter for PIR 7000	68 11 630

Ordering Information

Insect Guard for PIR 7X00	68 11 609
Hydrophobic Filter for PIR 7X00	68 11 890
Calibration Adapter for PIR 7X00	68 11 610
Process Adapter for PIR 7X00, POM (Polyoxymethylene)	68 11 915
Process Adapter for PIR 7X00, Stainless Steel	68 11 415
Junction Box Aluminum for Remote Mount 'd'	45 44 099
Junction Box Stainless Steel for Remote Mount 'd'	45 44 098
Spacer	68 12 617
Dräger PIR 7000 334 for Remote 'e' Version	68 11 825
Dräger PIR 7000 340 for Remote 'e' Version	68 11 819

CORPORATE HEADQUARTERS

Drägerwerk AG & Co. KGaA
 Moislinger Allee 53–55
 23558 Lübeck, Germany
www.draeger.com

SYSTEM CENTERS

P. R. CHINA
 Draeger Safety Equipment
 (China) Co., Ltd.
 A22 Yu An Rd, B Area,
 Tianzhu Airport Industrial Zone,
 Shunyi District,
 Beijing 101300
 Tel +86 10 80 49 80 00
 Fax +86 10 80 49 80 05

GERMANY

Dräger Safety AG & Co. KGaA
 Revalstrasse 1
 23560 Lübeck
 Tel +49 451 882-2794
 Fax +49 451 882-4991

UNITED KINGDOM

Draeger Safety UK Ltd.
 Blyth Riverside Business Park
 Blyth, Northumberland NE24 4RG
 Tel +44 1670 352 891
 Fax +44 1670 544 475

REGION EUROPE SOUTH

Dräger Safety France SAS
 25, rue Georges Besse
 92182 Antony Cedex, France
 Tel +33 1 46 11 56 00
 Fax +33 1 40 96 97 20
Europe.South@draeger.com

USA

Draeger Safety, Inc.
 505 Julie Rivers, Suite 150
 Sugar Land, TX 77478
 Tel +1 281 498 1082
 Fax +1 281 498 5190
info.gds@draeger.com

REGION ASIA PACIFIC

Draeger Safety Asia Pte Ltd
 25 International Business Park
 #04-20/21 German Centre
 Singapore 609916
 Tel +65 6308 9400
 Fax +65 6308 9401
asia.pacific@draeger.com

REGION CENTRAL AND SOUTH AMERICA

Dräger Panama Comercial
 S. de R.L.
 Complejo Business Park,
 V tower, 10th floor
 Panama City
 Tel +507 377-9100
 Fax +507 377-9130
contactcsa@draeger.com

REGION MIDDLE EAST, AFRICA

Dräger Safety AG & Co. KGaA
 Branch Office
 P.O. Box 505108
 Dubai, United Arab Emirates
 Tel +971 4 4294 600
 Fax +971 4 4294 699
contactuae@draeger.com

Locate your Regional
 Sales Representative at:
www.draeger.com/contact

