





URACoil 546X

Uncoated engineered DURACoil liner reinforced with **HPPF**

FEATURES

- Multifilament polyester wrapping DURACoil liner reinforced with **HPPE**
- EN 388:2016 Cut Level C
- ANSI/ISEA 105-16: A3
- Uncoated palm
- 13-gauge liner
- Seamless knit
- High performance polyethylene (HPPE)

BENEFITS

- Increased cut resistance performance due to engineered DURACoil wrapping technology
- Optimal dexterity and tactile feel retained
- Maximum comfort when performing delicate tasks due to soft and flexible HPPE properties combined with high multifilament wrapping technique
- Seamless knit designed to prevent irritation
- Designed for easy movement and continuous wear
- A flexible, light glove providing effective protection against cuts
- Cost-efficient gloves that can be laundered and re-used
- Multi purpose cut glove at a nominal price
- A light, elastic low lint glove
- Light colour helps indentify soiling and contamination

IDEAL APPLICATIONS



Aerospace

INDUSTRY



Automotive



Cleanrooms



Manufacturing



Mechanical



Warehousing & Distribution

- Intricate parts handling
- Cleanroom
- Component Assembly
- White goods
- Quality control



- **MATERIAL**
- Engineered yarn
- HPPE
- Polyester

COATING

Uncoated



NORMS







SHOWA



DURACoil 546X



PACKAGING

- 10 Pair per polybag
- 12 Polybags per case
- 120 Pair per case




SIZES

- 6/S
- 7/M
- 8/L9/XL
- ~



White

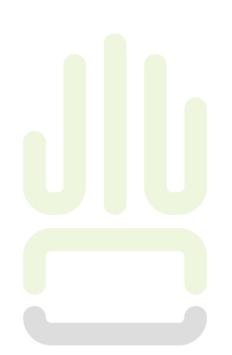



YOU MIGHT ALSO BE INTERESTED IN





MATERIAL HPPE COATING Uncoated CATEGORY Cut

USER INSTRUCTIONS

Do not use where there are chemical, electrical, thermal or entanglement risks. Wash at 40°C max. Performance levels as per standard EN388 retained after 3 washes, subject to variations linked to actual usage conditions. The performance levels apply to the coated surface only. Store in a dry place, away from the light.

DISCLAIMER

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.

