MEMBRAPOR SPECIFICATION SHEET







ETO/M-100

Ethylene Oxide Gas Sensor in Mini Housing

MEASUREMENT

Operation Principle	3-Electrode Electrochemical	
Nominal Range	0 – 100 ppm	
Maximum Overload	200 ppm	
Inboard Filter	_	
Output Signal	200 ± 40 nA/ppm	
Resolution (Electronics dependent)	< 0.2 ppm	
T90 Response Time	< 140 sec	
Typical Baseline Range (pure air, 20°C)	0 ppm to 9 ppm	
Maximum Zero Shift (+20°C to +40°C)	N.D.	
Repeatability	< 2 % of signal	
Output Linearity	Linear	
Gain	_	

ELECTRICAL

Rec. Load Resistor	10 Ohm
Bias (V_Sens-V_Ref)	+300 mV
Conformity to RoHS directive	RoHS Compliance

ENVIRONMENTAL

Relative Humidity Range	15 % to 90 % R.H. non- condensing
Temperature Range	-40 °C to 50 °C
Pressure Range	Atmospheric ± 10%
Pressure Coefficient	N.D.
Humidity Effect	none

LIFETIME


Expected Operation Life	2 years in air
Expected Long Term Output Drift in air	< 2 % per month
Filter Life	_
Storage Life	6 months in container
	o montro in containo.
Rec. Storage Temperature	5 °C – 20 °C

Performance data conditions: 20 °C, 50% RH, 1013 mbar

IMPORTANT NOTE

1) Fresh sensors with bias need 24-72 h for stabilization of the baseline

Miniature-Size Outline Dimensions

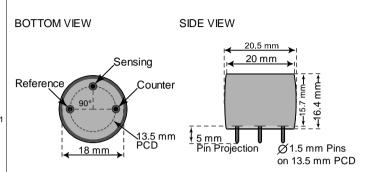

± 0.10 mm

MECHANICAL

Weight	5.5 g
Position Sensitivity	None

APPLICATIONS

Sterilization Processes
Safety and Environmental Control

CROSS-SENSITIVITY DATA

The table below does not claim to be complete. Interfering gases should not be used for calibration.

Interfering Gas	Conc.	Reading
	ppm	ppm
CO	100	45
Ethanol	30	21
Formic Acid	42	42 ± 3
Aromatic Hydrocarbons	30	< 15

REV.: 10/2018 Page 1 of 1

Phone: +41 43 311 72 00

Fax: +41 43 311 72 01

Email: info@membrapor.ch

www.membrapor.ch

MEMBRAPOR AG

Birkenweg 2

CH-8304 Wallisellen

Switzerland

The data contained in this document is for guidance only. Membrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.