

Level switch

NS 25/15 AM-DNV, NS 25/25 AM-DNV, NS 25 AM G1/2-DNV

Level switches for external installation are used to monitor and control fluid levels primarily in closed tanks.

Marine applications are subject to harsher operating conditions. Therefore, the components and devices to be used must undergo a type approval test.

Det Norske Veritas (DNV) is an approved classification society with high quality standards specialised in the marine sector.

Each AM switch is equipped with a display, which is even easy to see from various lines of sight. The contacts can be infinitely adjusted on the scale plate. They are activated by the magnetic system integrated in the float. There is a large selection of contacts available for various applications.

Depending on the model, flanges or fittings can be used for the connection. The MKS-1/W-L-24V contact model is equipped with an LED.

Level switches for external installation

DNV-GL shipbuilding approval

Compact size

Variable connections

Visual display

Floats for various mediums


Practice-oriented contacts

Sturdy design

Plug-in contacts



Technical Data

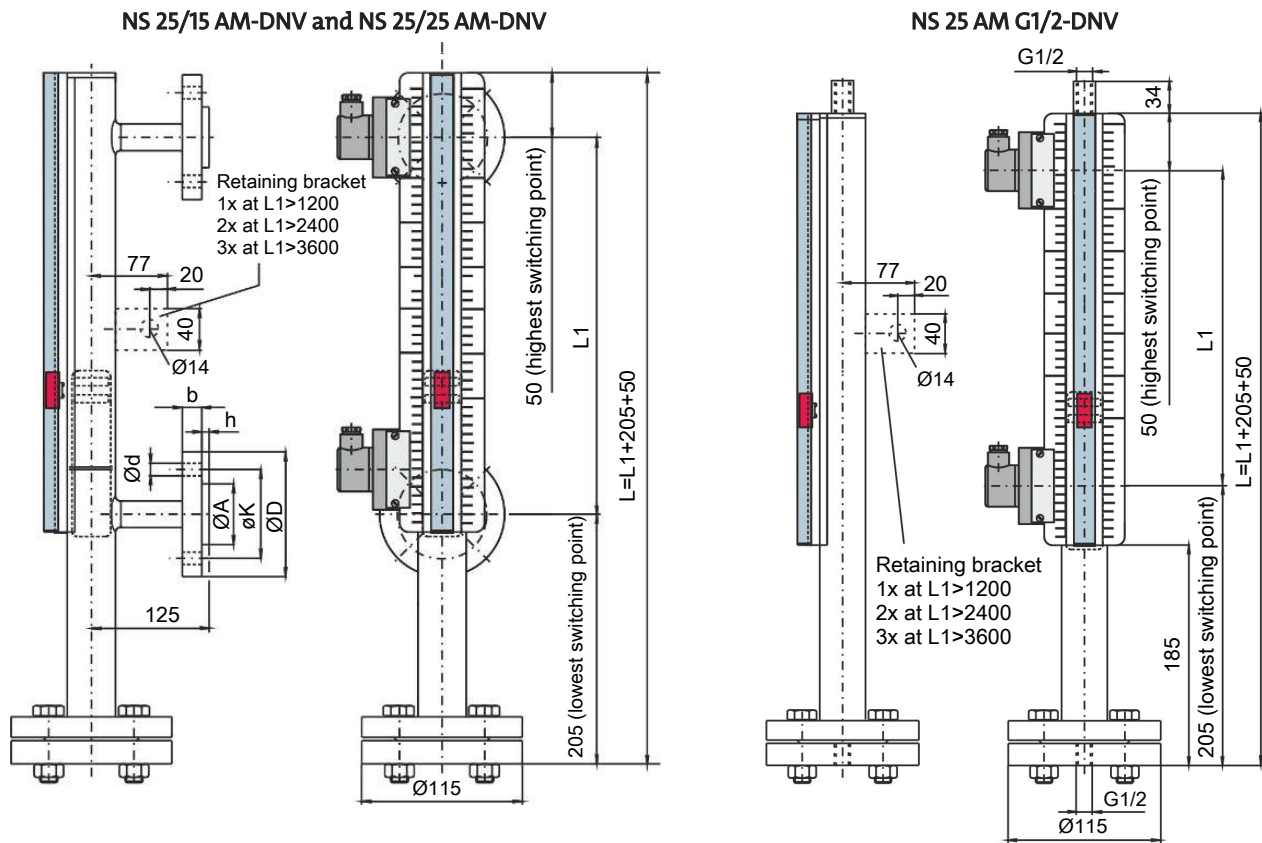

Attention! For adapter spacing over 1200 mm, additional retaining brackets are mounted to absorb vibration!

Technical Data

DNV certification classes

Temperature	C
Vibration	A
Humidity	B
Housing	B

Versions NS 25/15 AM-DNV; NS 25/25 AM-DNV; NS 25 AM G1/2-DNV

Max. operating pressure	25 bar
Max. operating temperature	+ 120 °C
spec. Min. fluid weight	≥ 0.85 kg/dm ³

Material

Float SK661	1.4571
Riser	1.4571
Flanges	St 52-3 galvanised
Sight glass	PC

Dimensions (in mm)

NS...AM-DNV	25/15	25/25
Connecting flange (DIN 2656)	DN 15	DN 25
ØD	95	115
øK	65	85
Ød	14	14
b	16	18
ØA	45	68
h	12	14
Weight at L1=500 mm	9.5 kg	10.5 kg

Contacts

Model	MKS-1/K	MKS-2/K	MKS-1/W	MKS-1/W-L 24 V
Contact type (bi-stable)	NC contact/NO contact	NC contact/NO contact	NO contact	NO contact
Max. operating voltage	230 V A/DC	230 V A/DC	230 V A/DC	24 V DC
Max. contact load	50 VA	50 VA	50 VA	50 VA
Max. switching current	1 A	1 A	1 A	1 A
Plug connection	3-pin + PE DIN 43650 (M3)	6-pin + PE DIN 43651 (S6)	3-pin + PE DIN 43650 (M3)	6-pin + PE DIN 43651 (S6)
Degree of protection	IP 65	IP 65	IP 65	IP 65
Item no.	2888999	2891999	2889999	2890999

Accessories

Flange seal	25/15	25/25
Model	Ø 45/ Ø 22x2	Ø 68/ Ø 27x2
Item no.	2251000	2252000
Set of retaining screws with nuts	25/15	25/25
Model	8x) DIN931-M12x80	8x) DIN931-M12x80
Item no.	2272999	2272999

Ordering Instructions

When ordering, always specify the measurement L1 and the number and type of contacts!

NS... AM-DNV with SK661	25/15	25/25	25 AM G1/2
Item no.:	2001999DNV	2003999DNV	20115399DNV