

Pressure transmitter Pressotronik 702

Monitoring the oil pressure is essential in hydraulic systems and oil supply systems. It's important to monitor both process-related pressure ranges as well as safety shutdowns, load limits or simply to determine if the lubricating pressure is adequate.

The pressure transmitters must meet a variety of requirements with respect to their pressure resistance, signal output, programmability or the plug connection style. A local or status display is often required for safety reasons.

The Pressotronik 702 pressure transmitters have a compact installation size, different connector plugs and fine-tuned pressure levels ranging from low-pressure to high pressure range.

Pressure ratings up to 600 bar

Compact and robust design

Stainless steel measuring cell

Pressure measuring cell welded seal-free with pressure sensor, no elastomer seal

High burst strength

2 plug connection options available



Technical Data
Pressure Transmitter Pressotronik 702

Pressure ranges	0 - 10 bar
	0 - 25 bar
	0 - 100 bar
	0 - 250 bar
	0 - 400 bar
	0 - 600 bar
Medium	Liquids, gasses and refrigerants, incl. ammonia
Pressure connection	G1/4 male thread, DIN 3852 Form E with profile gasket FPM
Overload <i>higher values upon request</i>	3 x limit at 10 to 600 bar (but max. 1500 bar)
Burst pressure	6 x terminal value (max. 2500 bar)
Mounting position	any
Weight	approx. 90 g
Material	
Housing	1.4305
Connector holder	Polyarylamide 50 % GF VO
Materials in contact with media	
Pressure connection	Stainless steel 1.4404 / AISI 316L
Measuring element	Stainless steel
Temperature	
Medium	-30 °C to +135 °C
Ambient temperature	-30 °C to +85 °C
Storage	-50 °C to +100 °C

Electrical data

Response time	<= 2 ms / typical 1 ms
Load cycle	<= 100 Hz
Supply voltage (U _b)	7 - 33 V DC
Power input	<= 23 mA
Output signal	4 - 20 mA, 2 wire
Load Ω	= (U _b - 7 V) / 0.02 A
Reverse polarity safety	Short circuit and reverse polarity safety (each connection to each with max. voltage)
Connection	M3 (IP 65)
<i>other versions on request</i>	M12 (IP 67) / Delivered without connector head

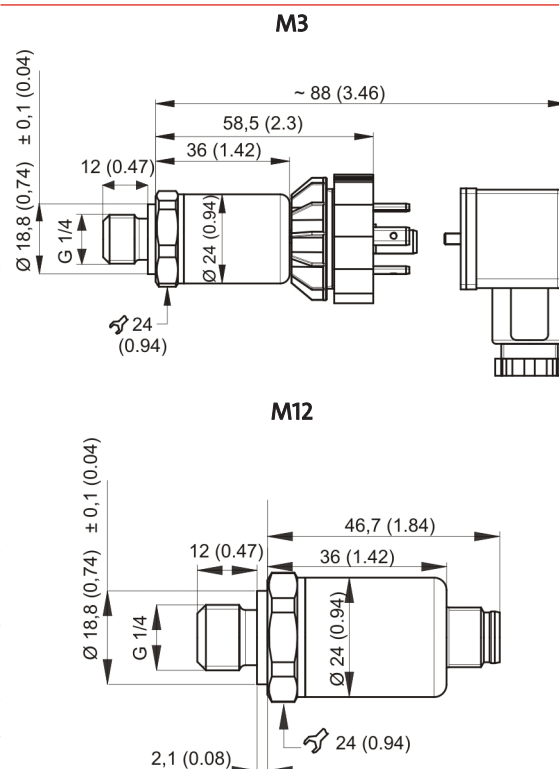
Accuracy (test conditions: 25 °C, 45 % RH, supply 24 VDC)

Characteristic*	± 0.3 % FS
Resolution	0.1 % FS
Thermal behaviour**	± 0.2 % FS/10K
Long-term stability per DIN EN 60770-1	± 0.25 % FS

*Typical; max. 0.5 % FS, ** -15 °C to +85 °C

Certificates/Approvals

Electromagnetic compatibility	CE compliant per EN 61326-2-3
Shock per IEC 60068-2-27	100 g, 11 ms, half-sine curve, all 6 directions, free fall from 1 m onto concrete (6x)
Continuous shock per IEC 60068-2-29	40 g over 6 ms, 1000x all 3 directions
Vibration per IEC 60068-2-6	20 g, 15...2000 Hz, 15...25 Hz with amplitude ± 15 mm, 1 octave/minute all 3 directions, 50 continuous loads




Dimensions


Ordering instructions Pressotronik 702

	PT 702	XXX	XXX	
Series				Plug connection
Pressure range				M3
010				M12
025				
100				
250				
400				
600				

Item no.	Description	
9144 05 0010	Connecting cable	M12x1, 1.5 m, angled coupler and straight plug
9144 05 0046	Connecting cable	M12x1, 3.0 m, angled coupler and straight plug
9144 05 0047	Connecting cable	M12x1, 5.0 m, angled coupler and strands

Standard pin assignment Pressotronik 702

	M3 (DIN EN 175301-803-A) 3-pin + PE IP 65	M12 (base) 4-pin IP 67
Plug connection		 
Pin assignment 2-lead	<ul style="list-style-type: none"> 1 +24 V DC 2 4-20 mA out 3 PE* 	<ul style="list-style-type: none"> 1 +24 V DC 2 3 4-20 mA out 4

* not connected to transmitter housing.