MEMBRAP RSPECIFICATION SHEET

Acid/C-100







Acetic Acid Gas Sensor in Compact Housing

| MEASUREMENT | |
|---------------------|-----------------------------|
| Operation Principle | 3-Electrode Electrochemical |
| Nominal Range | 0 – 100 ppm |
| Maximum Overload | 200 ppm |

Output Signal -90 ± 60 nA/ppm Resolution

< 1 ppm (Electronics dependent) T90 Response Time < 60 sec

Typical Baseline Range -2 ppm to 1 ppm (pure air, 20°C)

Maximum Zero Shift N.D. (+20°C to +40°C)

Repeatability < 2 % of signal

Output Linearity Linear Gain

Inboard Filter

ELECTRICAL

| | Rec. Load Resistor | 10 Ohm |
|---|------------------------------|-----------------|
| | Bias (V_Sens-V_Ref) | not recommended |
| (| Conformity to RoHS directive | RoHS Compliance |

ENVIRONMENTAL


| Relative Humidity Range | 15 % to 90 % R.H. non- condensing |
|-------------------------|--------------------------------------|
| Temperature Range | -40 °C to 50 °C |
| Pressure Range | Atmospheric ± 10% |
| Pressure Coefficient | N.D. |
| Humidity Effect | none |

LIFETIME

| Expected Operation Life | 2 years in air |
|--|---------------------------------|
| Expected Long Term Output Drift in air | N.D. |
| Filter Life | _ |
| Storage Life | 6 months in container |
| Rec. Storage Temperature | 5 °C – 20 °C |
| Warranty Period | 12 months from date of dispatch |

Performance data conditions: 20 °C, 50% RH, 1013 mbar

Compact-Size Outline Dimensions

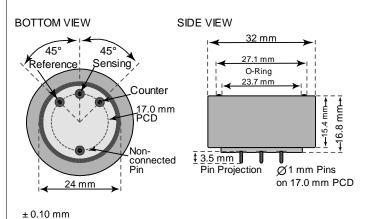

MECHANICAL

Weight 13 g Position Sensitivity None

APPLICATIONS

Measurment of organic acids Safety and Process Control

CROSS-SENSITIVITY DATA

The table below does not claim to be complete. Interfering gases should not be used for calibration.

| Interfering Gas | Conc. | Reading |
|-----------------|-------|---------|
| | ppm | ppm |
| NO_2 | 5 | 30 |
| Cl_2 | 20 | 150 |
| O_3 | 1 | 5 |
| NH ₃ | 80 | -12 |

REV.: 08/2018 Page 1 of 1

Phone: +41 43 311 72 00 MEMBRAPOR AG Fax: +41 43 311 72 01 Birkenweg 2 Email: info@membrapor.ch CH-8304 Wallisellen www.membrapor.ch

The data contained in this document is for guidance only. Membrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.