


Product Datasheet

Multi nozzle portable decontaminaton shower

PORTAflex 300/16e

This lightweight and robust decontamination shower is popular for stand-by use by emergency responders and the military. The lay-flat duraline hoses form four shower legs, each of which is fitted with four spray nozzles. Once erected and coupled to a water hydrant, water is admitted to the apparatus and the hoses become rigid under pressure, adopting a curved form to give 360° decontamination. Packed within a compact and rugged aluminium carrying case that doubles up as an effective base platform when in use.

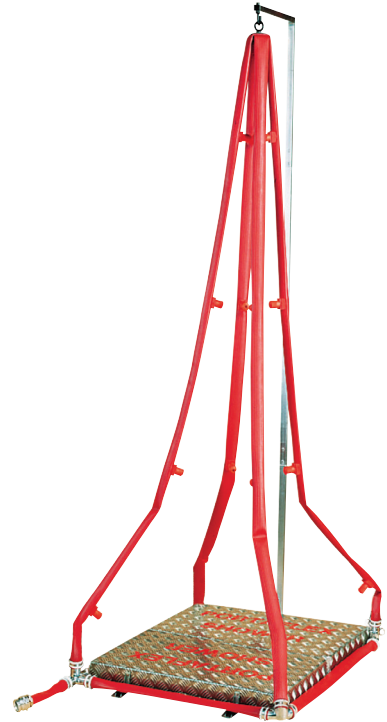

Specifications

MATERIALS OF CONSTRUCTION	
CASE	Aluminium
HOSE	High grade synthetic rubber, polyamide woven jacket
NOZZLES	½" machined PVC
SERVICES	
INLET SIZE	2½" male instantaneous coupling
OPERATING PRESSURE	3 to 7 BAR G / 43 to 101 PSI
MINIMUM FLOW RATE	750 L per minute / 198 US gal per minute
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	Assembled: 854mm (33.6in) x 1359mm (53.5in) x 2503mm (98.5in) Packed: 750mm (29.5in) x 164mm (6.4in) x 460mm (18.1in)
WEIGHT	23kg (50.7lb)

General Arrangement Drawing

Multi nozzle portable decontamination shower

PORTAflex 300/16e

